

Mitigate Fear. Prevent Injury.

D3O's materials are designed to absorb and dissipate energy in response to blunt force impact.

D3O ST is soft, flexible and versatile set foam material available in solid sheet formats, which can be used in multiple protection applications.

Product Features


D30°

- Suitable for high impact energies •
- Available in 4, 6 and 10mm thicknesses •



©2024 Design Blue Limited. All rights reserved.

D30 ST Material Sheet




ST Sheets

Product Details

| Material | ST | | |
|-----------------|-----------|-----------|------------|
| Product Name | Solid 4mm | Solid 6mm | Solid 10mm |
| Product Code | 13127 | 10983 | 14259 |
| Colour | Orange | Orange | Orange |
| Dimensions (mm) | 369 x 255 | 369 x 255 | 369 x 255 |
| Thickness (mm) | 4 | 6 | 10 |
| Density (g/cm³) | 0.50 | 0.50 | 0.45 |
| Material Type | Foam | Foam | Foam |

Test Results

D30°

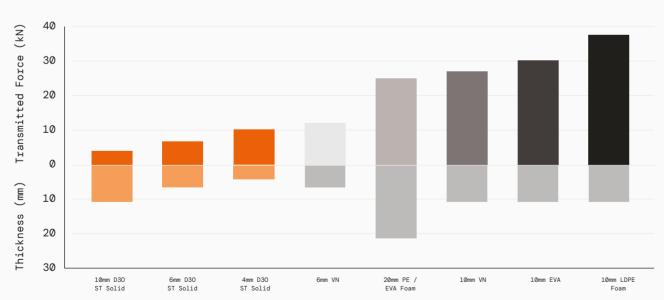

ST- Comparative Impact Test (10J)



©2024 Design Blue Limited. All rights reserved. Values shown represent typical product characteristics. For full details including material properties and product tolerances, please request SOQ document from D3O representative. The information provided is not intended to and does not create any warranties, expressed or implied, including any warranty of merchantability of fitness for a particular purpose. In accordance with the Company's policy of continuous improvement, D3O reserves the right to apply such improvements to its products and materials without notice. This data sheet shall not be reproduced or amended without the written consent of Design Blue Limited.



• Available in 4, 6 and 10mm thicknesses